


## Technical data

### Duropal Compact Worktop, white core

Compact high-pressure laminate with single or double-sided machined longitudinal edge in standard quality conforming to EN 438-9:BCS for use as a worktop. With uniform white-coloured core, single-sided decorative melamine resin surface and backing.

#### Applications

 Furniture and interior fitting

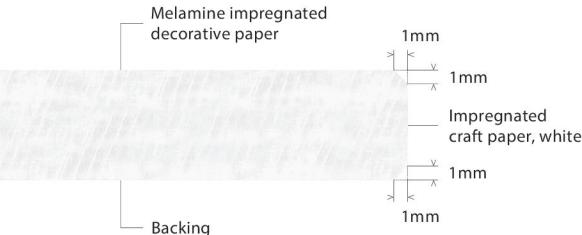

#### Properties

 Easy care	 Antimicrobial	 Food harmless
 High impact resistance	 Particularly low emission	

#### Certificates



Specification		Unit	Test standard
<b>Nominal thickness</b>	12	mm	
<b>Width</b>	640	mm	
Design front edge	chamfered		
Design rear edge	milled	chamfered	
Tolerance on thickness	± 0.8	mm	EN 438-2
Tolerance on length	+ 10	mm	EN 438-2
Tolerance on width	±0.5 mm at 500 mm, with an additional 0.05 mm for every extra 100 mm		EN 13894-1
Tolerance Bevelled edge (Longitudinal edge)	± 0.2	mm	
Surface defects (Product top side / usable Surface)	max. 1 <sup>1)</sup> max. 10 <sup>2)</sup>	mm <sup>2</sup> /m <sup>2</sup> mm/m <sup>2</sup>	EN 438-2
Surface defects (Texture CM)	Please note that both handling and also general use of the material can lead to a polishing effect in the surface structure, something which is most apparent.		
Edge defects (Head edge)	max. 3	mm	EN 438-2
Straightness of edges	± 0.5	mm/m	EN 13894-1
Squareness	≤ 2	mm/m	EN 13894-1
Flatness	max. 5	mm	EN 438-2
Density	min. 1,400	kg/m <sup>3</sup>	EN ISO 1183-1
Bending strength	min. 80	MPa	EN ISO 178
Flexural modulus	min. 9,000	MPa	EN ISO 178
Resistance to crazing	min. 3 <sup>3)</sup> min. 4 <sup>4)</sup>	rating	EN 438-2
Dimensional stability at elevated temperature (length)	max. 0.5	%	EN 438-2
Dimensional stability at elevated temperature (width)	max. 0.8	%	EN 438-2
Resistance to dry heat, 160 °C (other finishes)	min. 4	rating	EN 438-2

## Technical data

### Duropal Compact Worktop, white core

Specification			Unit	Test standard
<b>Nominal thickness</b>	<b>12</b>	<b>12</b>	<b>mm</b>	
<b>Width</b>	<b>640</b>	<b>950</b>	<b>mm</b>	
Resistance to water vapour (other finishes)	min. 4		rating	EN 438-2
Resistance to immersion in boiling water (other finishes)	min. 4		rating	EN 438-2
Resistance to immersion in boiling water (edge)	min. 3		rating	EN 438-2
Resistance to immersion in boiling water	max. 3 <sup>5)</sup> max. 4 <sup>6)</sup>		%	EN 438-2
Resistance to surface wear	min. 150		cycles	EN 438-2
Resistance to scratching (other finishes)	min. 3		rating	EN 438-2
Stain resistance (groups 1 & 2)	min. 5		rating	EN 438-2
Stain resistance (group 3)	min. 4		rating	EN 438-2
Resistance to colour change (xenon arc light)	min. 3 Grey Scale Grade <sup>3)</sup> min. 4 Grey Scale Grade <sup>4)</sup>			EN 438-2
Reaction to fire	normally flammable			
Reaction to fire (Euroclass)	D-s2,d0			EN 13501-1, CWFT conforming to 2003/593/EG
Formaldehyde emission class	E1 E05			EN 717-1

<sup>1)</sup> Dirt, spots and similar surface defects

<sup>2)</sup> Fibres, hairs and scratches

<sup>3)</sup> Edge/Core

<sup>4)</sup> Texture

<sup>5)</sup> Mass increase

<sup>6)</sup> Thickness increase

#### Additional information

Product standard	<ul style="list-style-type: none"> <li>EN 438-9</li> </ul>
Areas of application	<ul style="list-style-type: none"> <li>In all private and public interior application areas in which robustness, long durability, and high hygienic demands are placed on the Duropal Compact Worktop, such as in hotels and restaurants, shops, schools and sports facilities.</li> </ul>
Core material	<ul style="list-style-type: none"> <li>Compact laminate white</li> <li>Uniform white through-pigmented solid compact laminate core, impact resistant for applications with high specification demands.</li> </ul>
Product safety	<ul style="list-style-type: none"> <li>This product follows the REACH regulation EC 1907/2006 an article. Following Article 7 it does not need to be registered.</li> <li>The surface is physiologically safe, and approved for direct contact with food acc. to Regulation (EU) No. 10/2011.</li> <li>The decorative surface and the core consists of paper layers, which are impregnated with thermosetting resins. The resins harden completely during the manufacturing process by heat and high-pressure. They form a stable, resistant and non-reactive material.</li> <li>We manufacture the panels without the use of organohalogens, heavy metals, preservatives, wood protectors or organic solvents.</li> </ul>
Packaging construction	<ul style="list-style-type: none"> <li>Duropal Compact Worktops are delivered exclusively in individual cardboard packaging.</li> <li>The top / usable surface of the product is labelled in the factory.</li> <li>Packaged on pallets (colli).</li> </ul>

## Technical data

### Duropal Compact Worktop, white core

Antimicrobial effect	<ul style="list-style-type: none"> <li>Surface with antimicrobial effect in 24 h for interior fit-out and finishes – Test Methodology JIS Z 2801 / ISO 22196</li> <li>Depending on the decor and surface texture, slightly different surface visual impressions can result between cut panels viewed from different angles. This is a result of the production methods and does not constitute a quality defect.</li> <li>Especially for large applications, we recommend paying attention to the colour and texture uniformity of the boards and cut products used when further processing and installing and that the production direction is taken into account.</li> <li>Core colour: similar U11102</li> <li>Due to the white core of the material, minor decorative deviations to other products cannot be avoided.</li> <li>For production-related reasons, there may be minor colour variations in the white material core.</li> <li>Due to the material core, Duropal Compact Worktops with a white core are slightly harder and more brittle than Compact Worktops with a black material core. These will tend to warp more severely in case of climatic fluctuations.</li> <li>Decor-structure-combination front side = Decor-structure-combination reverse side</li> <li>Duropal Compact Worktop, white core is not supplied with protective foil.</li> <li>Due to the processing (chamfer, grind and saw) slight colour variations of the coloured material core may occur.</li> <li>Subsequent oiling (with suitable cooking oil) of the machined edge can reduce machining and wear marks.</li> <li>Please note that in everyday use, polishing, scratches and shiny spots may occur due to mechanical stress, which are particularly visible on darker decors. This does not represent a quality defect or a restriction of usability. Rather, it reflects the natural ageing of the surface. The product complies with all requirements of EN 438.</li> </ul>
Special	<ul style="list-style-type: none"> <li>With PEFC-certification.</li> <li>PEFC license code: PEFC/04-32-0828</li> </ul>
Note	<ul style="list-style-type: none"> <li>Decor, structure and core board all influence the final appearance of the end product.</li> <li>Due to the product-specific differences in production technologies, even identical decor/structure/core board combinations can result in slight optical and tactile deviations across different product groups and formats. Such deviations do not constitute a defect.</li> <li>The choice of surface structure in particular has a significant influence on the visual impression, the tactile perception as well as the technical characteristics of the product. Thus, the overall impression of a decor can change almost completely depending on the surface structure. Furthermore, mechanical influences on the product surface can lead to a higher contrast optical perception with dark decors.</li> <li>To ensure that you always achieve the best results with our products and to clarify any deviations in advance, we will be happy to advise you individually.</li> </ul>
Colour and surface match	

Further information on products, formats and decor/structure combinations is available at [www.pfleiderer.com](http://www.pfleiderer.com)

© Copyright 2025 Pfleiderer Deutschland GmbH

This information is issued with great care. We do not however accept any responsibility for the accuracy, completeness and timeliness. There may be slight colour differences between the printed brochure image and the actual design.

Due to the continuous development and modification of our products, possible changes to the relevant standards, laws and regulations, our technical data sheets and product documents expressly do not represent a legally binding guarantee of the properties specified therein. In particular, no suitability for a specific purpose can be derived from this information. It is therefore the personal responsibility of the individual user to check the processing and suitability of the products described in this document for the intended use and to take into account the legal framework and the current state of the art. Furthermore, we expressly refer to the validity of our general terms and conditions.

You can find our general terms and conditions on our webpage: [www.pfleiderer.com](http://www.pfleiderer.com)