

## Technical data


### DecoBoard Individual Motiv P3

Particleboard with individual digital print motifs in direct facing method for damp areas. The front face is printed as required, the standard reverse is white.

#### Applications



Furniture and interior fitting

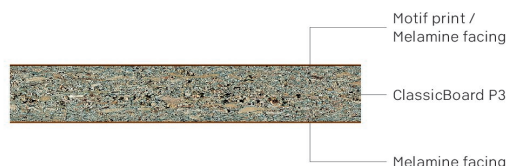

#### Properties



Individual printed motif



Easy care



Antimicrobial



Food harmless



Low swelling / moisture resistant

#### Certificates



Specification							Unit	Test standard
Nominal thickness	16	18	19	22	25	28	mm	
Tolerance on thickness	±0.3 for class 1, 2 +0.5/-0.3 for class 3A, 3B, 4 and gloss surfaces	±0.3 for class 1, 2 +0.5/-0.3 for class 3A, 3B, 4 and gloss surfaces	±0.3 for class 1, 2 +0.5/-0.3 for class 3A, 3B, 4 and gloss surfaces	±0.5	±0.5	±0.5	mm	EN 14323
Length- and width tolerance	± 5						mm	EN 14323
Flatness	≤ 2 <sup>1)</sup>						mm/m	EN 14323
Edge damage	≤ 10						mm	EN 14323
Surface defects (Points)	≤ 2						mm <sup>2</sup> /m <sup>2</sup>	EN 14323
Surface defects (Defect in the length)	≤ 20						mm/m	EN 14323
Resistance to scratching	≥ 1.5 <sup>2)</sup>						N	EN 14323
Resistance to staining	≥ 3						Rating	EN 14323
Resistance to cracking	≥ 3						Rating	EN 14323
Resistance to abrasion (plain colours)	3A						Class	EN 14323
Resistance to abrasion (printed designs)	1						Class	EN 14323
Resistance to abrasion (printed designs with overlay)	3A						Class	EN 14323
Resistance to colour change in xenon arc light	min. 4 Grey Scale Grade							EN 14323
Mean density	690 - 680 <sup>3)</sup>	690 - 680 <sup>3)</sup>	690 - 680 <sup>3)</sup>	680 - 660 <sup>3)</sup>	680 - 660 <sup>3)</sup>	660 - 640 <sup>3)</sup>	kg/m <sup>3</sup>	EN 323
Bending strength	14 <sup>3)</sup>	14 <sup>3)</sup>	14 <sup>3)</sup>	12 <sup>3)</sup>	12 <sup>3)</sup>	11 <sup>3)</sup>	N/mm <sup>2</sup>	EN 310
Bending modulus of elasticity	1,950 <sup>3)</sup>	1,950 <sup>3)</sup>	1,950 <sup>3)</sup>	1,850 <sup>3)</sup>	1,850 <sup>3)</sup>	1,700 <sup>3)</sup>	N/mm <sup>2</sup>	EN 310

## Technical data

### DecoBoard Individual Motiv P3

Specification							Unit	Test standard
Nominal thickness	16	18	19	22	25	28	mm	
Internal bond	0.45 <sup>3)</sup>	0.45 <sup>3)</sup>	0.45 <sup>3)</sup>	0.4 <sup>3)</sup>	0.4 <sup>3)</sup>	0.35 <sup>3)</sup>	N/mm <sup>2</sup>	EN 319
Thickness swell (24 h)	14 <sup>3)</sup>	14 <sup>3)</sup>	14 <sup>3)</sup>	13 <sup>3)</sup>	13 <sup>3)</sup>	13 <sup>3)</sup>	%	EN 317
Formaldehyde release	E1 E05							
Reaction to fire (Euroclass)	D-s2,d0 conforming to EN 13986 dependent on end use (Thickness: ≥ 9 mm / Gross density: ≥ 600 kg/m <sup>3</sup> )							

<sup>1)</sup> If symmetrical construction

<sup>2)</sup> Except smooth and matt structures

<sup>3)</sup> Core material

#### Additional information

Product standard	<ul style="list-style-type: none"> <li>in accordance with EN 14322</li> </ul>
Areas of application	<ul style="list-style-type: none"> <li>Preventive fire protection for individual furniture and interior fitting elements, wall fittings and partitions, shopfitting, trade fair stands, boatbuilding, caravans, hotels, spas, medical centres, offices and living spaces. You will find the right, individually tailored product for every requirement notably if special low emissions are needed. Not suitable for horizontal surfaces and or surfaces exposed to mechanical loads.</li> </ul>
Core material	<ul style="list-style-type: none"> <li>ClassicBoard P3</li> <li>Melamine resin bonded particleboard type P3, suitable for non load-bearing purposes in damp areas.</li> </ul>
Product safety	<ul style="list-style-type: none"> <li>This product follows the REACH regulation EC 1907/2006 an article. Following Article 7 it does not need to be registered.</li> <li>The surface is physiologically safe, and approved for direct contact with food acc. to Regulation (EU) No. 10/2011.</li> <li>We manufacture the panels without the use of organohalogens, heavy metals, preservatives, wood protectors or organic solvents.</li> </ul>
Antimicrobial effect	<ul style="list-style-type: none"> <li>Surface with antimicrobial effect in 24 h for interior fit-out and finishes – Test Methodology JIS Z 2801 / ISO 22196</li> </ul>
Resistance to heat	<ul style="list-style-type: none"> <li>Heat sources (e.g. coffee machines, printers, fax machines, etc.) should not come into direct contact with the board, otherwise cracks may form due to drying out. For continuous exposure to heat, temperatures of up to 50°C are permissible. In the case of permanent exposure to heat, we expressly draw attention to the risk of cracking.</li> </ul>
Special	<ul style="list-style-type: none"> <li>Maximum motif format per board, incl. overprinting: 2,750 mm x 2,030 mm. Larger motifs can be tiled.</li> <li>Assignment of the motifs parallel with the edge of the coreboard is not possible for production reasons.</li> <li>Depending on the decor and surface texture, slightly different surface visual impressions can result between cut panels viewed from different angles. This is a result of the production methods and does not constitute a quality defect.</li> <li>Colour differences can occur in follow-up production lots.</li> <li>Cut to size is not available.</li> </ul>
Note	<ul style="list-style-type: none"> <li>FSC certification or PEFC certification available on request.</li> <li>FSC license code: FSC® C011773</li> <li>PEFC license code: PEFC/04-32-0828</li> </ul>
Colour and surface match	<ul style="list-style-type: none"> <li>Decor, structure and core board all influence the final appearance of the end product.</li> <li>Due to the product-specific differences in production technologies, even identical decor/structure/core board combinations can result in slight optical and tactile deviations across different product groups and formats. Such deviations do not constitute a defect.</li> <li>The choice of surface structure in particular has a significant influence on the visual impression, the tactile perception as well as the technical characteristics of the product. Thus, the overall impression of a decor can change almost completely depending on the surface structure. Furthermore, mechanical influences on the product surface can lead to a higher contrast optical perception with dark decors.</li> <li>To ensure that you always achieve the best results with our products and to clarify any deviations in advance, we will be happy to advise you individually.</li> </ul>

## Technical data

### DecoBoard Individual Motiv P3

Further information on products, formats and decor/structure combinations is available at [www.pfleiderer.com](http://www.pfleiderer.com)

© Copyright 2025 Pfeiderer Deutschland GmbH

This information is issued with great care. We do not however accept any responsibility for the accuracy, completeness and timeliness. There may be slight colour differences between the printed brochure image and the actual design.

Due to the continuous development and modification of our products, possible changes to the relevant standards, laws and regulations, our technical data sheets and product documents expressly do not represent a legally binding guarantee of the properties specified therein. In particular, no suitability for a specific purpose can be derived from this information. It is therefore the personal responsibility of the individual user to check the processing and suitability of the products described in this document for the intended use and to take into account the legal framework and the current state of the art. Furthermore, we expressly refer to the validity of our general terms and conditions.

You can find our general terms and conditions on our webpage: [www.pfleiderer.com](http://www.pfleiderer.com)

---

**Pfleiderer Deutschland GmbH**

Ingolstädter Str. 51  
92318 Neumarkt  
Germany

phone	+49 (0) 91 81 28 48 0
Fax	+49 (0) 91 81 28 48 2
	<a href="mailto:info@pfleiderer.com">info@pfleiderer.com</a>
	<a href="http://www.pfleiderer.com">www.pfleiderer.com</a>