


## Technical data

### PrimeBoard XTreme High Gloss MDF black

Decorative black through-dyed melamine faced medium-density fibreboard (MDF), with high quality and innovative high gloss multi-layer coating, made up of a permanently elastic functional layer, for vertical applications.

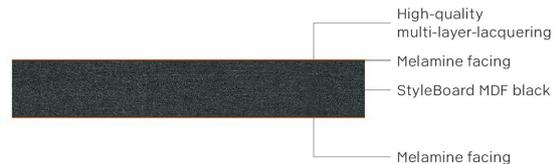

#### Applications



Furniture and interior fitting

#### Properties



High brilliance



Variety of decors and / or textures



Easy care



Easy to use and machine

#### Certificates



Specification				Unit	Test standard
<b>Nominal thickness</b>	<b>16</b>	<b>19</b>	<b>25</b>	<b>mm</b>	
Tolerance on thickness	+0.5/-0.3	+0.5/-0.3	±0,5	mm	EN 14323
Length- and width tolerance		± 5		mm	EN 14323
Flatness		≤ 2 <sup>1)</sup>		mm/m	EN 14323
Edge damage		≤ 10		mm	EN 14323
Resistance to scratching		≥ 2.5		N	in accordance with EN 15186 / Method B
Resistance to microscratching		1		Class	DIN CEN/TS 16611, IHD-W-466 / Method A
Cross-cut test		≤ 1		Specific value	EN ISO 2409
Chemical resistance		1B		Durability class	DIN 68861-1
Surface gloss		≥ 90 / 60°			EN 13722
Behavior at abrasion		2A		Durability class	DIN 68861-2
Resistance to colour change in xenon arc light		min. 4 Grey Scale Grade min. 6 Blue Wool Standard			EN 15187
Resistance to cracking		5		Rating	EN 14323
Behaviour in dry heat		7C (100 °C)		Durability class	DIN 68861-7
Behaviour in humid heat		8B (70 °C)		Durability class	DIN 68861-8
Surface defects	Surface defects must not have a detrimental effect. Defects not larger than 1.0 mm <sup>2</sup> and detected from an observation distance of 0.7 m and a viewing angle of about 30° during the evaluation of the surface are permissible. Max. 1 fault per m <sup>2</sup> is permissible. The total number of defects allowed per board may be concentrated in one area or split across several defects.				
Reaction to fire	normally flammable				

## Technical data

### PrimeBoard XTreme High Gloss MDF black

Specification				Unit	Test standard
Nominal thickness	16	19	25	mm	
Reaction to fire (Euroclass)	D-s2,d0				EN 13986 (CWFT) dependent on end use
Formaldehyde emission class	E1 E05 TSCA Title VI				EN 717-1
Mean density	770 <sup>2)</sup>			kg/m <sup>3</sup>	EN 323
Flexural strength	27 <sup>2)</sup>			N/mm <sup>2</sup>	EN 310
Modulus of elasticity (bending stiffness)	2,300 <sup>2)</sup>			N/mm <sup>2</sup>	EN 310
Internal bond	0.6 <sup>2)</sup>			N/mm <sup>2</sup>	EN 319
Thickness swell (24 h)	≤ 12 <sup>2)</sup>	≤ 12 <sup>2)</sup>	≤ 10 <sup>2)</sup>	%	EN 317

<sup>1)</sup> If symmetrical decor structure

<sup>2)</sup> Core material

#### Additional information

Product standard	<ul style="list-style-type: none"> <li>in accordance with EN 14322</li> </ul>
Areas of application	<ul style="list-style-type: none"> <li>Exclusive interior and project fixtures and fittings, living room and bedroom furniture / sliding doors, bathroom furniture and kitchen fronts.</li> </ul>
Core material	<ul style="list-style-type: none"> <li>StyleBoard MDF black</li> <li>Decorative black through-dyed medium-density fibreboard (MDF), with a uniform structure.</li> </ul>
Product safety	<ul style="list-style-type: none"> <li>This product follows the REACH regulation EC 1907/2006 an article. Following Article 7 it does not need to be registered.</li> <li>We manufacture the panels without the use of organohalogens, heavy metals, preservatives, wood protectors or organic solvents.</li> </ul>

## Technical data

### PrimeBoard XTreme High Gloss MDF black

Special	<ul style="list-style-type: none"> <li>The lacquering can be applied on one or both sides.</li> <li>Please comply with information for PrimeBoard XTreme Collection</li> <li>The main quality features of PrimeBoard XTreme are listed in this document. Individually requested properties not listed here can, if necessary, be answered on request in accordance with the relevant standards and test procedures.</li> <li>Due to the industrial manufacturing process and despite state-of-the-art production technology, it is not possible to produce a completely faultless surface, minor imperfections and surface irregularities are therefore permissible.</li> <li>To protect the high quality surface Pfleiderer delivers these surface textures with a protective foil. The protective foil must be removed as soon as possible after processing – but at the latest within 6 months after delivery – to ensure residue-free removal of the foil. In addition, foiled boards must not be exposed to direct sunlight (UV radiation).</li> <li>We recommend use in indoor areas with normal climatic conditions, i.e. with a relative humidity of 40 – 60 % and natural daylight. In buildings with ventilation technology, the normal climate must be permanently maintained by means of appropriate ventilation.</li> <li>All stated technical values apply only in moderate climate zones with room temperatures of max. 35°C.</li> <li>Under unfavourable climatic conditions, such as temperatures above 35°C, complete darkness and very high humidity, coated products may develop a slight dark yellowing. This is reversible by UV irradiation, but a complete restoration of the original colour is not guaranteed. We accept no liability for this process and the resulting colour changes.</li> <li>PrimeBoard XTreme is supplied chamfered on all sides. Before further processing a trimming cut is necessary.</li> </ul>
Disposal	<ul style="list-style-type: none"> <li>PrimeBoard XTreme is classified in waste wood class A2. The known disposal regulations regarding material and energy recovery apply.</li> </ul>
Note	<ul style="list-style-type: none"> <li>FSC certification or PEFC certification available on request.</li> <li>FSC license code: FSC® C011773</li> <li>PEFC license code: PEFC/04-32-0828</li> </ul>
Colour and surface match	<ul style="list-style-type: none"> <li>Decor, structure and core board all influence the final appearance of the end product.</li> <li>Due to the product-specific differences in production technologies, even identical decor/structure/core board combinations can result in slight optical and tactile deviations across different product groups and formats. Such deviations do not constitute a defect.</li> <li>The choice of surface structure in particular has a significant influence on the visual impression, the tactile perception as well as the technical characteristics of the product. Thus, the overall impression of a decor can change almost completely depending on the surface structure. Furthermore, mechanical influences on the product surface can lead to a higher contrast optical perception with dark decors.</li> <li>To ensure that you always achieve the best results with our products and to clarify any deviations in advance, we will be happy to advise you individually.</li> </ul>

Further information on products, formats and decor/structure combinations is available at [www.pfleiderer.com](http://www.pfleiderer.com)

© Copyright 2026 Pfleiderer Deutschland GmbH

This information is issued with great care. We do not however accept any responsibility for the accuracy, completeness and timeliness. There may be slight colour differences between the printed brochure image and the actual design.

Due to the continuous development and modification of our products, possible changes to the relevant standards, laws and regulations, our technical data sheets and product documents expressly do not represent a legally binding guarantee of the properties specified therein. In particular, no suitability for a specific purpose can be derived from this information. It is therefore the personal responsibility of the individual user to check the processing and suitability of the products described in this document for the intended use and to take into account the legal framework and the current state of the art. Furthermore, we expressly refer to the validity of our general terms and conditions.

You can find our general terms and conditions on our webpage: [www.pfleiderer.com](http://www.pfleiderer.com)